



## Features

- Available in four interconnectable lengths
- 3-in-1 5050 RGB LEDs every 0.6" create bright and dynamic effect lighting
- 120V system consumes up to 2.7 watts per foot and maximizes run distance (150ft max run)
- cETLus Listed<sup>†</sup>
- Suitable for indoor use and limited outdoor use in areas protected from extreme weather
- 20,000 hours rated life

## Available Colors



RGB

## Control Options\*

- RGB-H2-IR-5A
- RGB-H2-CTRL with Standalone Mode
- RGB-H2-CTRL plus DMX Control
- RGB-H2-CTRL + RGB-H2-REC-RF for Radio Frequency Options

## Listing / Ratings<sup>†</sup>



## Hybrid 2 RGB


Four convenient lengths of 120V AC Hybrid 2 RGB are interconnectable up to 150 feet. With a low-profile, Hybrid 2 RGB is efficient and effective, using less than 3 watts per foot. Parallel wiring to each LED means if one LED goes out, the rest still get power. Use with the 120V plug-in Standalone Controller (required\*) which has built-in color select, preset effect, speed, and brightness options; or interface with DMX equipment; or add an RF Receiver for Trulux RF control.

## Technical Information


Series	RGB-H2
Input Voltage	120V AC, 60Hz
CCT	RGB
Wattage	2.7W per ft
Max Run	150 feet
Cuttable	Non-cuttable <sup>†</sup>
IP Rating	IP65 (uncut), void if cut
Dimmable	RGB / DMX / RF Control
Rating	cETLus Listed <sup>†</sup> for indoor/outdoor use
Rated Life	20,000 hrs

\*Hybrid 2 RGB requires the use of RGB-H2-IR-5A or RGB-H2-CTRL (sold separately)

<sup>†</sup>cETLus Listing for 120V is void if cut; No accessories available for cut product

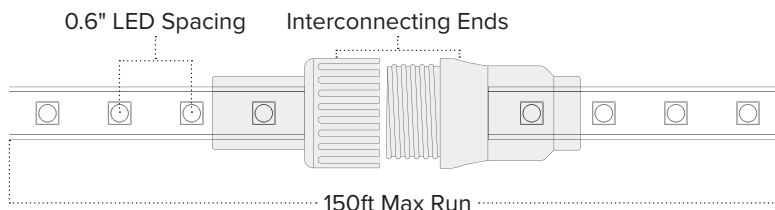

## Hybrid 2 RGB Extendable Linear Light

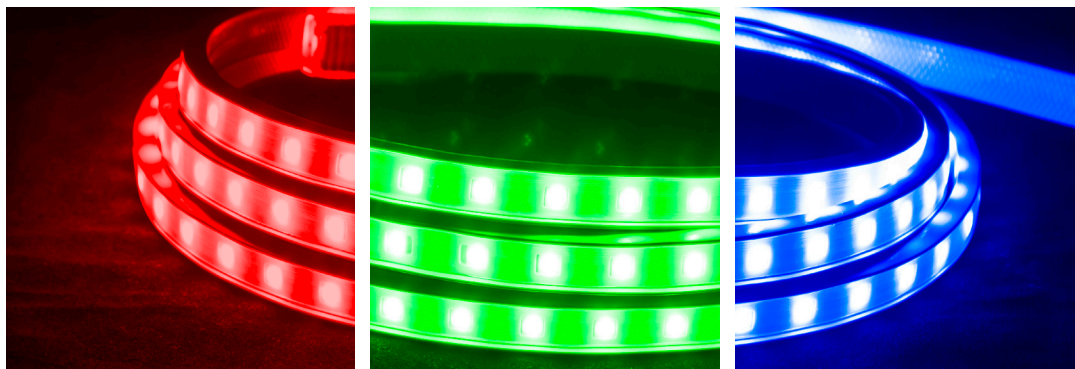

Hybrid 2 RGB  
120V AC, 60Hz

- RGB-H2-EXT-3** (3ft / 8.1W)
- RGB-H2-EXT-12** (12ft / 32.4W)
- RGB-H2-EXT-30** (30ft / 81W)
- RGB-H2-EXT-45** (45ft / 121.5W)

Hybrid 2 RGB Extendable Linear Light Includes: (1) Hybrid 2 RGB segment with molded male+female connectors / (1) Removable end cap / (1) Clear plastic mounting clip per foot of length

## Hybrid 2 RGB Accessories



**Standalone Controller**  
(Required for operation)  
Non-rated; IP67; Also required  
for DMX 512 operation  
**RGB-H2-CTRL**



**RF Receiver**  
(For RF Control)  
Non-rated; Requires Trulux RF  
Controller with RGB-H2-CTRL  
**RGB-H2-REC-RF**



**IR Controller**  
(120V / Up to 150ft)  
cETLus Listed, Indoor/Outdoor;  
Incl. remote and 5ft power cord  
**RGB-H2-IR-5A**



**Mounting Clips**  
(10) Aluminum clips  
with (20) screws  
**RGB-H2-CLIPS-AL**



**Mounting Channel**  
Aluminum  
**RGB-H2-CHAN-3** (3ft)



**3-Channel DMX Controller**  
5ft 120V AC power cord plus adapter  
Nine color presets  
**DMX-RGB-3**



**XLR3 Adapter**  
Auxiliary DMX controller cable  
for RGB-H2-CTRL  
**RGB-H2-XLR3-PT**



**Signal Linking Cable**  
Interconnectable  
Link multiple RGB-H2-CTRL units  
**RGB-H2-CTRL-EC15** (15ft)



**Twist-on Linking Cables**  
Interconnectable between lighted sections  
**RGB-H2-EXT-JUMP.5** (6")  
**RGB-H2-EXT-JUMP3** (3ft)  
**RGB-H2-EXT-JUMP10** (10ft)  
**RGB-H2-EXT-JUMP20** (20ft)

## Hybrid 2 RGB Basic Set-up

